

PRODUCT DATA SHEET



MAGNETIC CONTACTOR
Picture is for reference only,
Actual Kit may vary slightly


PART NUMBER - B3RT1035-1AC21:

BRAH Electric, aftermarket direct replacement contactors for Siemens 3RT1035-1AC21, Sirius line, type 3RT, 3P, 3PH, 40A, 600V, 15HP @ 230V, 30HP @ 460V, 40HP @ 575V, complete with 24V AC coil, AC magnetic contactor, suitable for use with 3RT series motor control systems


PRODUCT SPECIFICATIONS


Manufacturer	BRAH Electric
Sub-Category	Contactor
Phase	3
Poles	3
Voltage Max	600
Amperage Max	40
Coil Voltage Min	24
Coil Voltage Max	24
Min HP.Rating	15(HP) @230V
Max HP.Rating	40(HP) @575V


Warranty: All Products sold by BRAH Electric are guaranteed to be free of defect for a period of two years, under the condition that the product has been installed and operated properly. All items proven defective within the one year period will be replaced by BRAH Electric. In the event that we cannot provide a direct replacement, your monies will be refunded in full. We are not responsible for any consequential losses or damages outside of the defective product as well as any replacements or repairs performed by another party without our written authorization from BRAH Electric.





STOPS FOR ATTACHING FRONT MOUNTED ACCESSORIES




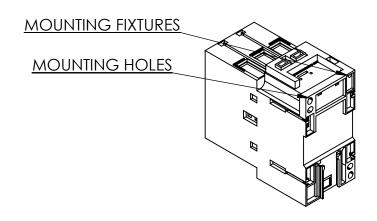









WWW.BRAHELECTRIC.COM, 855-355-2724

*NOTE: BRAH ELECTRIC CONTACTOR B3RT1035-1AC21 IS AN AFTERMARKET DIRECT REPLACMENT FOR 3RT1035-1AC21,3RT SERIES. SUITABLE FOR USE WITH 3RT SERIES MOTOR CONTROL SYSTEMS THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BRAH ELECTRIC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BRAH ELECTRIC IS PROHIBITED.

UNLESS OTHERWISE NOTED

ALL DIMENSIONS ARE IN INCHES METRIC UNITS ARE DISPLAYED BENEATH IN [MM.]

MATERIAL

MOLDED PLASTIC CASE

N/A

DO NOT SCALE DRAWING



MAGNETIC CONTACTOR

SCALE:1:3 WEIGHT: 3.2 LBS SHEET 1 OF 1