E-Mail: Sales@brahelectric.com

www.Brahelectric.com

PRODUCT DATA SHEET



PART NUMBER – BA210-30-11-51: BRAH Electric, aftermarket direct replacement contactors for ABB A210-30-11-51, A-Line series, type A, 3P, 3PH, 192A, 600V, 75HP @ 240V, 150HP @ 480V, 200HP @ 600V, complete with 480V AC coil, and 1 N/O - 1 N/C auxiliary contact, AC magnetic contactor, suitable for use with A-Line series motor control systems

PRODUCT SPECIFICATIONS

MAGNETIC CONTACTOR


PART NO. BA210-30-11-51

TYPE	VALUE (UNITS)	NOTES	COMMENTS
PHASE	3		
POLES	3		
VOLTAGE	600 (VAC)		
AMPERAGE	192 (A)		
COIL VOLTAGE MIN	480(V)		
COIL VOLTAGE MAX	480(V)		
MIN HP. RATING	75 (HP)	@ 240V	
MAX HP RATING	200 (HP)	@ 600V	


ADDITIONAL INFORMATION:

Warranty: All Products sold by BRAH Electric are guaranteed to be free of defect for a period of one year, under the condition that the product has been installed and operated properly. All items proven defective within the one year period will be replaced by BRAH Electric. In the event that we cannot provide a direct replacement, your monies will be refunded in full. We are not responsible for any consequential losses or damages outside of the defective product as well as any replacements or repairs performed by another party without our written authorization from BRAH Electric.

^{*} We use fine quality silver for our contacts, containing 95% silver content

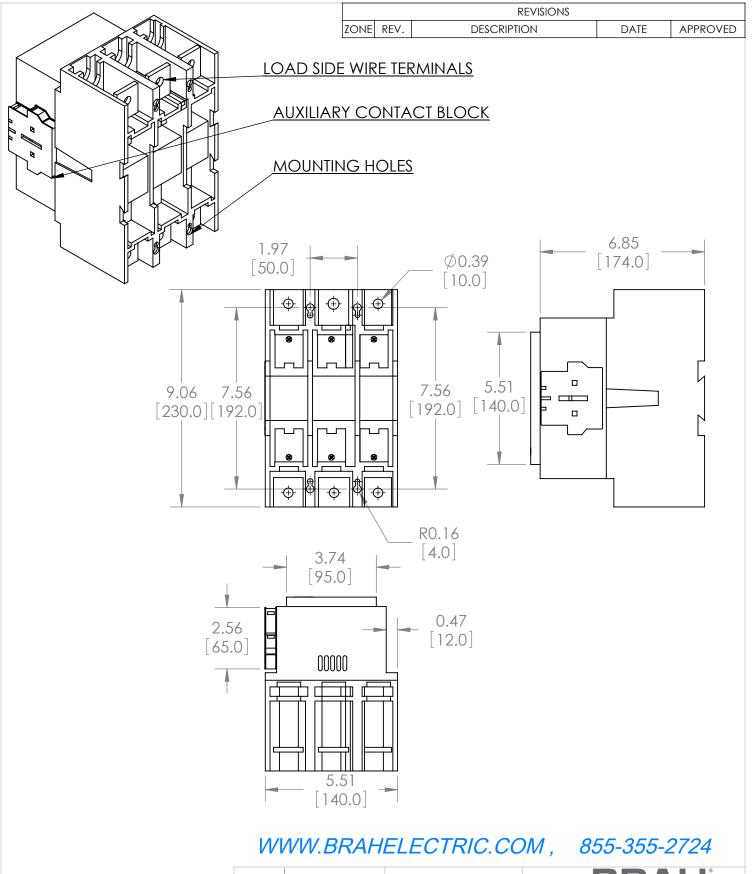

*NOTE: BRAH ELECTRIC CONTACTOR BA210-30-11-51 IS AN AFTERMARKET DIRECT REPLACMENT FOR A210-30-11-51, A-LINE SERIES. SUITABLE FOR USE WITH A-LINE SERIES MOTOR CONTROL **SYSTEMS**



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BRAH ELECTRIC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BRAH ELECTRIC IS PROHIBITED.

UNLESS OTHERWISE NOTED

ALL DIMENSIONS ARE IN INCHES METRIC UNITS ARE DISPLAYED BENEATH IN [MM.]

MOLDED PLASTIC CASE FINISH

DO NOT SCALE DRAWING

N/A



MAGNETIC CONTACTOR

BA210-30-11-51 Ã SCALE:1:4 WEIGHT: 3.2 LBS SHEET 1 OF 1